



**PRODUCT SPECIFICATIONS**

PART NUMBER: LW102-04422



AT-A-GLANCE	
CABLE TYPE	LANDSCAPE CABLE
AWG	10
COLOR	BLACK
PACKING	SPOOL
LENGTH	500 ft.
COMPLIANCE	
 	


**PRODUCT DESCRIPTION**

Low Voltage Landscape Cable 10 AWG 2 Stranded Bare Copper Conductors, black SR-PVC insulation.

**PHYSICAL SPECIFICATIONS**

Conductor Size	10 AWG
Number of Conductors	2
Conductor Material	Stranded bare copper
Strands Per Conductor	105
Insulation Material	SR-PVC
Insulation Colors	Black
Nominal O.D.	.426" x .212" (10.8 mm x 5.4 mm)
Insulation Thickness	.045" (1.143 mm)
Flame Rating	Direct Burial
Cable Marked for Polarity	Yes

**CONSTRUCTION**

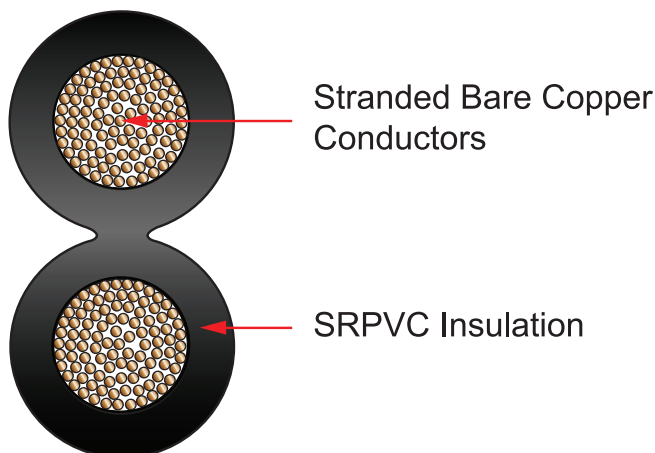

**ELECTRICAL CHARACTERISTICS**

Max Voltage Rating	150 V
Temperature Rating	-20°C to 75°C
Max Amps	see NEC tables 11A & 11B
Max Wattage	see NEC tables 11A & 11B

**CABLE IDENTIFICATION**

VERICOM E-479172 10 AWG (UL) UNDERGROUND LOW ENERGY CIRCUIT CABLE 150V AC SUNLIGHT RESISTANT

**VERICOM<sup>®</sup> STRANDED LANDSCAPE CABLE**

These low-voltage landscape lighting cables are suitable for outdoor accent lighting, landscape lighting and security lighting applications not exceeding 150 Volts. This product can be installed outdoors exposed to sunlight or buried below ground. Low-voltage landscape lighting cable is suitable for use at temperatures not exceeding -20° C or maximum 75° C.

**PACKAGING**

500 ft. Wooden Spool